



Pastomaster

Innovative Carpigiani Pasteurization technology lets you control quality over the entire frozen dessert production by letting you create your own mixtures











Performance The ingredients are mixed and pasteurized inside the exchange pump cup located on the tank bottom. This exclusive, patented Carpigiani technology guarantees high micronization: the millimetric cup-beater coupling and the different mixing speeds reduce the fat globules to particularly fine sizes, from 2 to 5 microns, for a creamier and smoother Gelato or Ice Cream. Pastomaster HE superior efficiency can even work with small mixture batches without the risk of burning the mix. Furthermore, the original dry bain-marie system avoids product buildup.

2

Convenience Internal Exchange pump allows for smooth processing of liquids. Thanks to the absence of a traditional beater; user can raise lid and add ingredients while the mix continues to be blended. Rear hose brackets organize water supply tubes. Water Filling function dispenses precise quantity of water required by the recipe and/ or for cleaning, saving time and avoiding measuring errors. Optional removable stainless-steel bucket shelf.

Savings Carpigiani HIGH EFFICIENCY technology, equipped with high-performance condensers, providing maximum efficiency during pasteurization of the mixes. Pastomaster HE ensures generous savings in water consumption, up to 30% compared to RTX pasteurizers.

Safety With TEOREMA you can monitor the machine via the internet, PC, tablet, and smartphone. Technical service is facilitated thanks to the ability to remotely perform controls and diagnostics. To avoid splatter of boiling liquid, the beater stops moving if the lid is lifted when the mix is hotter than $122^{\circ}F$ (50°C).

Hygiene The stainless steel shower head is located on the front of the machine for easy cleaning. Scoth-Brite treatment of the stainless steel is resistant to stains and fat residues. The new shape of the spigot makes it possible to wash the mix spout at any time, during any stage of production. Ask your Carpigiani dealer for the "Carpi Care Kit" to best maintain equipment.




*Carpi Care kit: request it from your dealer to always keep your machine hygienically perfect.


carpigiani.com/us

Pastomaster 60 HE





28.1



	WATER			
Weights	lbs	s. I	(gs.	
Net	36	4	165	
Crated	40	1	182	
	cu.	ft. ci	cu. m.	
Volume	23.	0	0.7	
Dimensions	in	. (cm.	
Width	13.	7	35	
Depth	35.	4	90	
Height	43.4		110	
Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)	
208-230/60/3 Water	30	30	3P, 3W	

Specifications

Electrical

A dedicated electrical connection is required. Manufactured to be permanently connected. See the Electrical chart for the proper electrical requirements. Consult your local Carpigiani distributor for cord & receptacle specifications as local codes allow.

Beater Motor

1,5 HP

Refrigeration System R404A

Water Cooled

Water inlets and drain connections in the rear 1/2" MPT


Air Cooled

Available soon

Tank Capacity

63 quarts (60 liters)

All specifications mentioned must be considered approximate; Carpigiani reserves the right to modify, without notice, all parts deemed necessary. This unit may be manufactured in other electrical characteristics and may have additional regulatory agency approvals, please consult the local Carpigiani Distributor. Check name plate for exact electrical data.

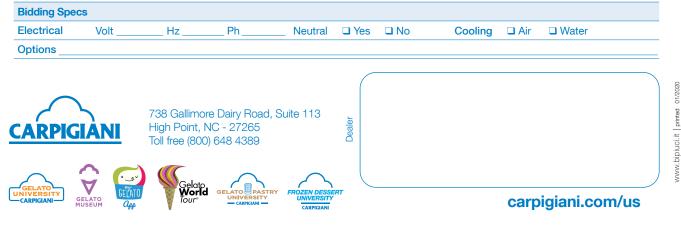

an Ali Group Company

